


MASHIKO 360 LED 7099
SKU 1121018

astro

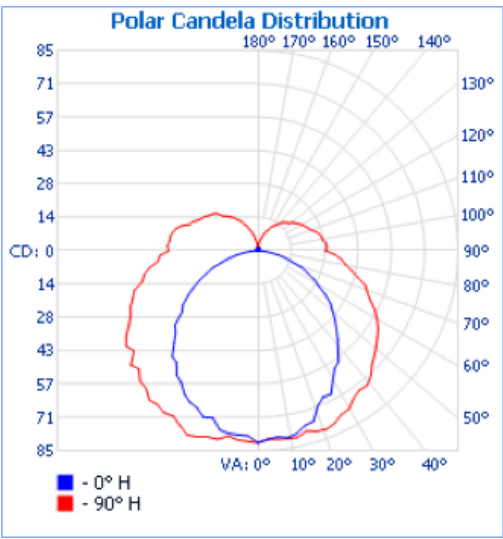

PRODUCT SPECIFICATION

GENERAL

FINISH:	Polished Chrome	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Mild Steel	GROSS WEIGHT:	1.517 (kg)
DIMENSIONS:	H: 360mm W: 80mm D: 80mm	CLASS:	CE (Class II)
INSTALLATION ORIENTATION:	Wall Mount - Horizontal/Vertical Ceiling Mount (Reduced IP Rating)	IP RATING:	IP44
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 2, 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials


LAMP

LIGHT SOURCE:	Mid-Power LED	MACADAM ELIPSE:	3-Step
MAXIMUM WATTAGE:	6.4W	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	394.4 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	3000 (K)	AVERAGE LIFESPAN:	60,000 (Hrs)
CRI:	80	L70:	To Be Advised
R9:	32.3		

ELECTRICAL

SWITCHED:	No	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER/BALLAST VOLTAGE:	100-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	30,000 (Hrs)
DRIVER OUTPUT CURRENT:	700 (mA)	EFFICACY:	49.7 (lm/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER/BALLAST INCLUDED?	Yes (Integral)

ADDITIONAL INFORMATION



BOX QUANTITY X6

PRODUCT ELEVATIONS

